

# OVERHEAD DOORS

**DOOR SYSTEMS KAMLOOPS**

971 H Laval Crescent  
Kamloops, BC V2C 5P4  
Tel: 250-374-5655 Fax: 250-828-1054

---

Date: APRIL 27 / 22

Project: ALTITUDE SUNPEAKS BC

Section: DIV 8 OVERHEAD DOORS


**GUARANTEE:**

All materials are guaranteed from any defects from the use of materials, deficiencies of design strength or by reason of poor workmanship which may appear within ONE year(s) from the date of substantial performance.

**DOOR SYSTEMS KAMLOOPS**

  
Dan Valiquette

MODELS: 10C / 20C / 20CTM / 60C

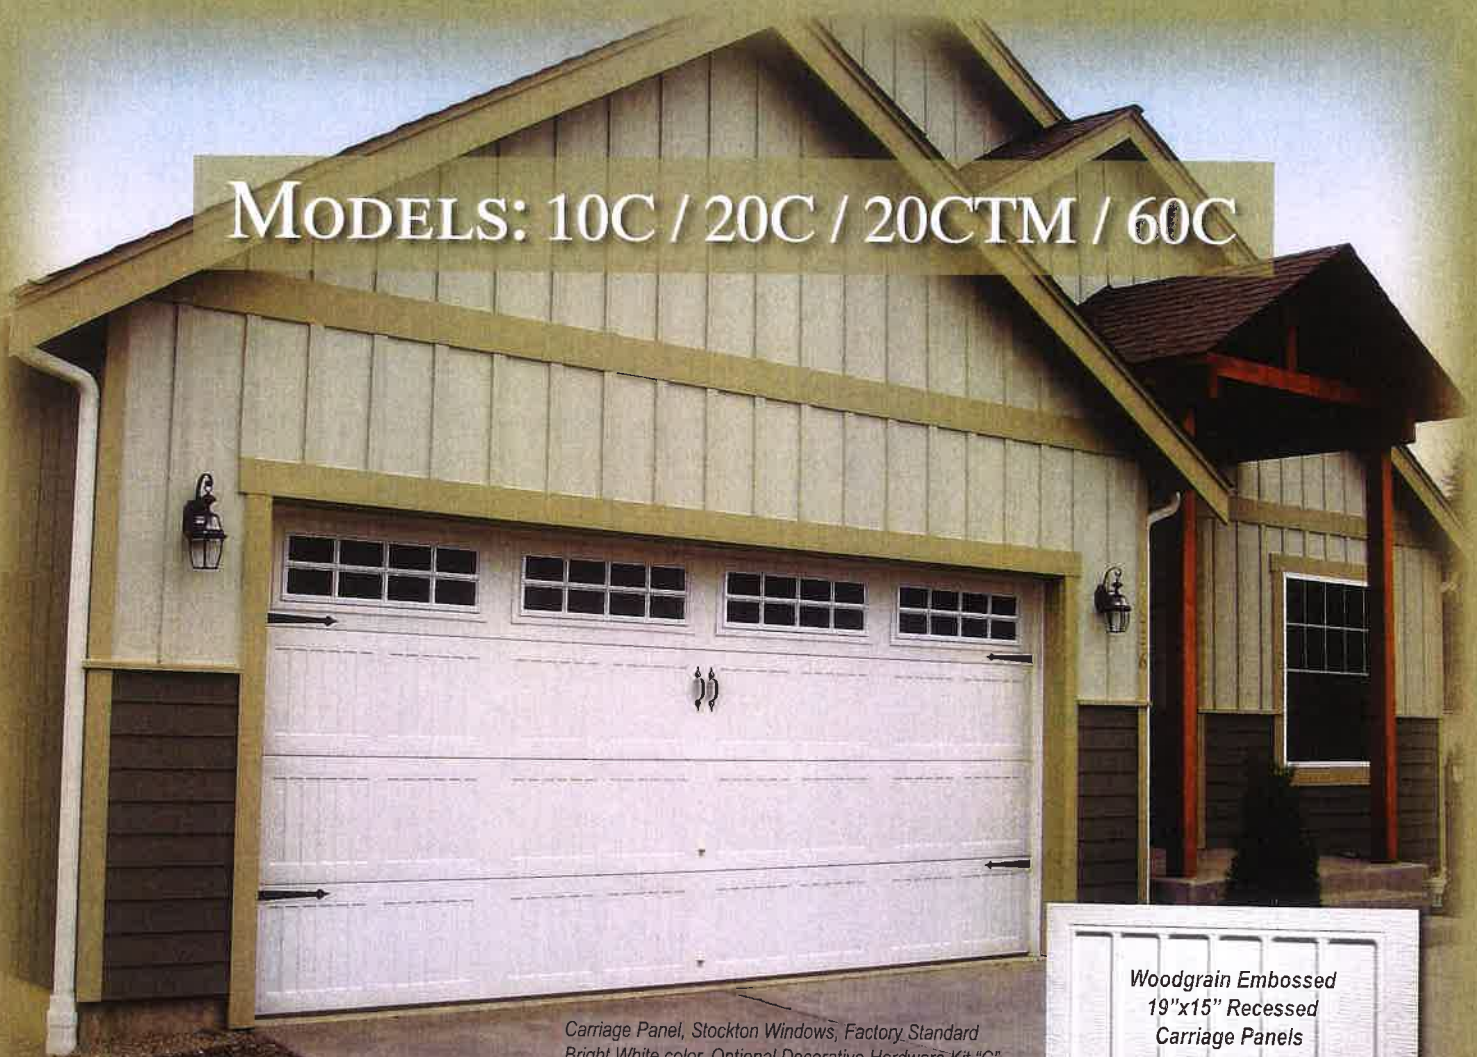


*Carriage Panel, Stockton Windows, Factory Standard Bright White color, Optional Decorative Hardware Kit "C"*




*Woodgrain Embossed 19"x15" Recessed Carriage Panels*

## CARRIAGE PANEL




*The Carriage panels offer a unique and stylish appearance to your home. Two optional decorative hardware kits can also be added to enhance the look and charm of swing type doors. Eight optional window designs are shown below. Optional glass types are shown on page 7.*


### DESIGN SELECTION




ASHTON




HERITAGE




ARCHED STOCKBRIDGE




CASCADE




PLAIN LITE



STOCKBRIDGE



STOCKTON



WILLIAMSBURG

### DECO HARDWARE KITS



B-TRADITIONAL SERIES



C-AMERICANA SERIES



8 3 5 5 W

# 1/2 HP AC BELT DRIVE WI-FI® GARAGE DOOR OPENER

Reliable and secure with the convenience of built-in Wi-Fi.



WARRANTY

LIFETIME  
Motor and Belt

1-YEAR  
Parts and  
Accessories

## INCLUDED ACCESSORIES:

### MULTI-FUNCTION CONTROL PANEL®

Turns on garage door opener  
lights from inside the garage.



882LMW

### 3-BUTTON REMOTE CONTROL

Operates up to 3 openers or  
MyQ Light Accessories.



893LM

## PROTECTIVE ADD-ONS:

### REMOTE LIGHT CONTROL

Enables home lighting control  
through a garage remote or a  
smartphone.



825LM

### GARAGE DOOR AND GATE MONITOR

Monitors and closes up to 4 garage  
doors from any room in the house.



829LM

### MINI UNIVERSAL REMOTE CONTROL

Compact and portable to provide  
quick, easy garage access.



374UT

### WIRELESS KEYLESS ENTRY

Provides convenient, secure  
access from outside the garage  
with a 4-digit PIN.



877MAX

RELIABLE  
SMART  
SECURE

P3  
MOTORS®

1/2 HP AC MOTOR IS PURPOSEFULLY DESIGNED AND BUILT TO LAST.

BELT DRIVE SYSTEM FOR QUIET, MAINTENANCE-FREE PERFORMANCE.

MOTOR VIBRATION ISOLATION SYSTEM (MVIS®) PROVIDES QUIET, RELIABLE OPERATION.



FREE MyQ® MOBILE APP SO USERS KNOW THEIR HOME IS SECURE.

BUILT-IN WI-FI FOR THE EASIEST WAY TO CONNECT THE GARAGE.

REAL-TIME ALERTS INDICATE THE STATUS OF THE GARAGE DOOR VIA EMAIL OR PUSH NOTIFICATIONS.

MONITOR AND CONTROL THE OPENER FROM ANYWHERE USING MOBILE DEVICES.

### Security+ 2.0®

SAFEGUARDS GARAGE ACCESS BY SENDING A NEW CODE WITH EVERY CLICK.

POSILOCK® ELECTRONICALLY PROTECTS AGAINST FORCED OPENINGS.

ALERT-2-CLOSE SIGNALS WHEN A DOOR IS BEING CLOSED BY MyQ.

THE PROTECTOR SYSTEM® INVISIBLE LIGHT BEAM AUTO-REVERSES THE DOOR IF THERE IS AN OBSTRUCTION.

PRODUCT GUIDE 8355W

1/2 HP AC BELT DRIVE  
WI-FI GARAGE DOOR OPENER

LiftMaster  
PREMIUM SERIES

**8355W**

1/2 HP AC Belt Drive Wi-Fi® Garage Door Opener

# MASTERFUL ENGINEERING.

## MOTOR

- 1/2 Horsepower AC
- 1.625 RPM
- Automatic Thermal Protection

## POWER

- 120VAC
- 60 Hz Voltage
- 6A Current Rating
- UL Listed
- 4' Power Cord (3-Prong)



7.5"

19"


10.5"

## MECHANICS

- Steel Chassis, T-Rail and Trolley
- Full Reinforced Belt Drive Mechanism (16:1 Gear Reduction and Adjustable Door Arm)
- Auto-Force Adjustment for Changing Weather and Environmental Conditions
- Electronic Limits for Easy Setup
- AC Wi-Fi Logic Board with Built-In Surge Suppressor

## DIMENSIONS

Rail Options	7'	8'	10'
Installed Length	128"	140"	164"
Max. Opening	7'6"	8'6"	10'6"
Headroom Clearance Required: 2"			

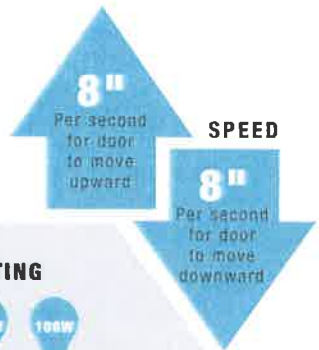

# STANDARD SPECS.

SECURITY

## SECURITY+ 2.0® RADIO CONTROLS

3-Button Remote Control (893LM)  
Operating Range: ~200'

- Operating Temperature: -30°F to 150°F  
Frequency:
- Remote Control: 310, 315 and 390 MHz Tri-Band
  - Garage Door Opener: Frequency Agile on 310, 315 and 390 MHz
  - Security+ 2.0 Rolling Code Technology

## SECURITY+ 2.0 ENCRYPTED CONTROLS

- Multi-Function Control Panel® (882LMW)
- Program Remote Controls
  - Maintenance Alert System
  - Easy Wi-Fi Setup

SMART

## MyQ® RADIO

902-928 MHz  
50-Channel FHSS  
(Frequency Hopping Spread Spectrum)

- Provides 2-way communication from garage door opener and MyQ Accessories.
- Enables monitoring and control of garage door openers and lighting controls via smartphone, tablet or computer.

## HOMELINK® COMPATIBLE (VERSION 4.0 OR HIGHER\*)

\*May require an external adapter depending on the model and year of your vehicle. Visit [HomeLink.com](http://HomeLink.com) for additional information.

ELECTRICAL

## LIGHTING



- Max. 2 100-Watt Lightbulbs
- Adjustable Time
- Enhanced CFL (Compact Fluorescent) Compatible, Max. 26 Watts

## ENERGY EFFICIENCY

- Approximately 1.5-Watt Power in Standby Mode\*
- \*Occurs at Down Limit When Opener's Lights Turn Off

# SHIPPING.

SHIPPING WEIGHT (in lbs.)



## CARTONS (2)

- CARTON 1: 20" x 12" x 10"
- Multi-Function Control Panel (882LMW)
  - 3-Button Remote Control (893LM)
  - Garage Door Opener Head (8355W)
  - The Protector System® Safety Reversing Sensors
- CARTON 2: 10'4" x 5" x 5"
- Assembled Solid-Steel Belt T-Rail

# CONVENIENCE AND SAFETY.



- Alert-2-Close/Unattended Close Operation†
- Emergency/Quick Release
- Automatic Trolley Reconnect
- Ventilation/Pet Opening
- Down Safety Reverse
- Safety Beam Obstruction Turns Lights On
- Maintenance Alert System
- Garage Door Opener Capacity of up to 24 Remote Controls, 2 Wireless Keyless Entry Systems and 16 MyQ Devices

© 2016 LiftMaster All Rights Reserved

845 Larch Ave., Elmhurst, IL 60126

LiftMaster.com

Wi-Fi® is a registered trademark of Wi-Fi Alliance

HomeLink® and the HomeLink House® logo are registered trademarks of Genlex Corporation

LMGDPS355W

†Note: to reduce the risk of injury to persons, only use Alert-2-Close/Unattended Close Operation features when installed with a sectional door.



# Planned Maintenance Inspection Details

## Sectional Overhead Doors



### Operation Types

Manual - Chainhoist - Electric - Pneumatic

#### *Door Functionality*

- Check system operation
- Safety devices
- Activation devices
- Door balance and level
- Manual disconnect and operation
- Back up chain hoist

#### *General Service Items*

- Connection to building
- All parts inspected and tightened
- All parts lubricated
- Debris cleared from components hindering operation

#### *Drive System*

- Door connection and J-Arm
- Trolley components
- Sprocket, tensioner and chain
- Pneumatic drive system components

#### *Door Face and Hardware*

- Sections, windows and frames
- Weather stripping
- Pickets, mesh and fascia
- Hinges, rollers and span braces
- Bottom and top brackets
- Safety fail-safe devices

#### *Tracks*

- Condition and functionality
- Mount to structure
- Spacing
- Support bracing and noise isolation

#### *Electrical*

- Electrical controller enclosure
- Motor, limit switches and relays
- Connections and junction boxes
- Power disconnect and voltage

#### *Lift Counterweight Assembly*

- Shaft, couplers and cables
- Pulleys and pickups
- Drums, set screws and bearings
- Torsion springs, cones and anchor plates
- Safety fail-safe devices
- Counterweights and assembly

#### *Locks and Accessories*

- Door locks
- Pull ropes
- Bumper and pusher springs
- Safety signage

#### *Activation Devices*

- Push button and key switches
- Loop, treadle hose and sensors
- Receiver and remotes
- Access control system